



Stainless Steel Storage Pods Installation Instructions

SAFETY GUIDELINES
REQUIRED TOOLS
KIT CONTENTS
PREPARATION TIPS
INSTALLATION PROCEDURE

STH / STHL - Horizontal Storage Pods

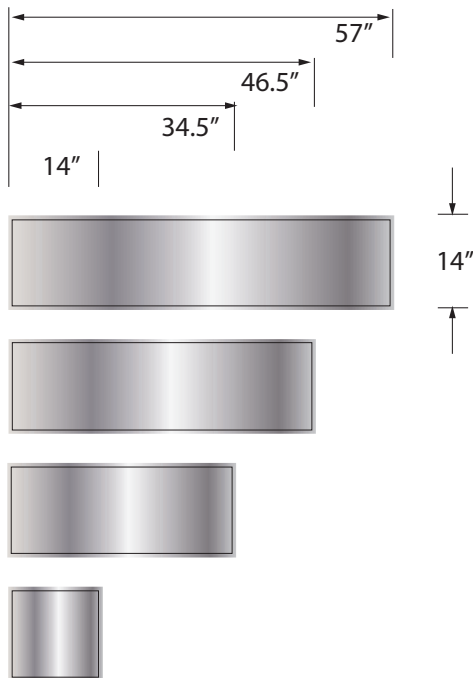

STV / STVL - Vertical Storage Pods

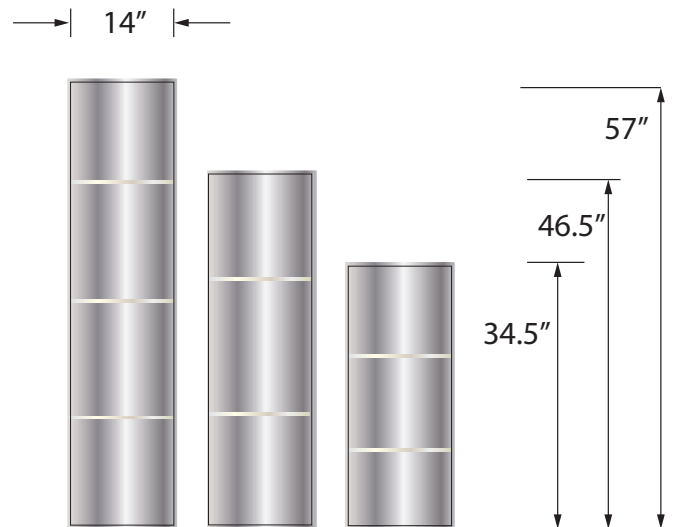

READ AND UNDERSTAND BEFORE INSTALLING

Safety Guidelines

IMPORTANT NOTICE

IMPORTANT NOTICE: Indicates that equipment or property damage can result if instructions are not followed.

Read and Understand the Manual

It is the responsibility of any individual who installs or maintains this product to fully understand and follow proper installation and maintenance procedures. Be aware of the inherent dangers in the use of power tools when installing this product. Read and understand all Warnings, Cautions, and Important Notices in this manual.

Work Safely

DO NOT proceed if any doubt arises about the correct or safe method of performing anything found in this or other installation manuals. The installation of this product can require using power tools. Do not use power tools without adequate training. If necessary, hire or consult a trained professional for expert assistance before continuing.

Use Proper Tools

Always use proper tools which are in good, working condition during the installation of our products. Using tools other than those listed could adversely affect the integrity of floors, pipes, walls, or this product and could result in water damage or other damage to floors, pipes, walls, or other portions of your building or home.

Do Not Use Nails

The storage pod mounts to walls with 100% clear silicone sealant only. We recommend 100% clear silicone sealant to mount this product. Never use hammers, nails, or screws. Hammers, nails and screws could adversely affect the integrity of this product. Nails and screws could puncture our Wall Systems and Panels, resulting in water or other damage to floors, pipes, walls or other portions of your building or home.

Inspect Before Cutting

Make sure no electrical wiring or plumbing is present before cutting into a wall to install any accessories.

Wall Conditions

Inspect the storage pods before installing. Never install pods over damp walls or an existing mold condition.

Use Proper Installation Methods

Follow all instructions related to wall surface preparation. Failure to follow such instructions could cause the pods to detach from the wall surface after installation, resulting in personal injury. Failure to follow these instructions could result in water damage.

WARNING

Lifting Hazard

According to the National Institute of Occupational Safety and Health, the recommended maximum safe lifting weight is 51 pounds, with all lifting conditions perfect - minimal forward reach, steady load close to the body, straight back, load between knees and shoulders, and good grips. To avoid personal injury, always use these proper lifting techniques and use two people to move carton weighing more than 51 lbs. The box containing a storage pod can weigh in excess of 100 pounds depending on pod size. Use the appropriate lifting devices to move the load. Always use two people when lifting heavy or bulky cartons. DO NOT attempt to lift objects that are too heavy. When carrying a heavy load - get help!

Room Temperature

Consult the 100% silicone sealant manufacturer's instructions for storage and surface preparation. Failure to follow this recommendation could adversely affect the silicone sealants which holds the pods to the wall. If the pods are not correctly adhered to the walls, they may fall off, causing possible injury to someone in or around the shower enclosure.

Eye Protection

Be sure to use all personal protective equipment to ensure your own safety. To avoid eye injury, always wear protective glasses with side shields when using power tools. Also, make sure no one else can be injured by flying particles when using power tools.

Personal Protection

Be sure to use all personal protective equipment, such as sturdy work boots, preferably with steel toes, gloves, and hard hat, if necessary, to ensure your own safety. To prevent possible damage to your hearing, always wear ear protection, such as earmuffs or earplugs, when working around power tools.

Cutting Hazard

The installation of our product may require using power tools. Keep hands away from the cutting edge of any tool used in the installation of our product. Place fingers in or around the cutting blades could result in serious personal injury.

Sharp Edge Hazard

After cutting the edge of a panel, it can be sharp. Wear protective gloves to prevent personal injury.

Slipping Hazard

Do not install this product in the presence of water. Installing this product without drying all surfaces, or in the presence of water, could cause you to slip and fall due to wet floors or spilled fluids. Personal injury can result from slips or falls. Before installation, dry all surfaces, including the floor, with a cloth or paper towel. Clean up all water or spilled fluids immediately.

Fire Hazard

Personal injury or death can result from a fire caused by flammable liquids or silicone sealants. Cleaners or solvents can be highly explosive, resulting in personal injury or even death, when not used properly. Clean up any flammable substance immediately. Sparks or open flames can cause flammable substances to ignite. DO NOT smoke while working on or near any flammable substance.

Solvent Hazard

Follow all manufacturer's safety instructions for silicone sealants and denatured alcohol. Alcohol vapors are both flammable and hazardous to breathe. Silicone vapors may irritate eyes and nose. Personal injury can result from improperly handling or use of products, such as denatured alcohol. Always follow the manufacturer's recommendations for the safe use of these products. Ventilate any work area before beginning to apply silicone sealants, cleaning agents, or solvents.

Fumes Hazard

The fumes from the silicone and solvents used by the installer can be harmful if used in an unventilated room. Always work in a well ventilated area. To keep the area well-ventilated, open windows and use exhaust fans. If adequate ventilation is not achievable or practical, use respiratory protective equipment.

Dust Hazard

When cutting or drilling our product, use a dust collection method which prevents dust particles from going into the air. Always work in a well-ventilated area. Always use an OSHA approved dust mask when cutting, drilling, or sanding our products.

Power Tool Hazard

To prevent personal injury or possible death, always follow the electrical safety recommendations of the power tool's manufacturer. Do not use power tools in an unsafe manner. Power tools should only be connected to a circuit protected by a ground-fault circuit interrupter (GFI).

Shock Hazard

Never use electric power tools around water, condensation, or other liquids. Electric shock can cause severe burns, significant injuries, and even death. If an extension cord is required, always use an OSHA approved extension cord. Power cords should only be connected to a circuit protected by a ground-fault interrupter (GFI).

Electrical Shock Hazard

Contacting live electrical wiring with power tools or hand tools can cause serious injury or death. Make sure all related circuit breakers are turned OFF. Test for live circuits or wiring inside any wall where installation of our product requires cutting into a wall.

Electrocution Hazard

Water and other liquids conduct electric current and can create a short circuit, resulting in injury or death. Keep all liquids away from electrical cords and power tools. DO NOT create a short circuit between a source of electricity and a liquid by being in contact with both simultaneously.

General Information

Required Tools

- 100% clear silicone sealant
- Circular saw with 60 to 80 tooth carbide blade
- Saber saw (straight up and down travel) with bi-metal blade (14 teeth per inch)
- Drill with 3/8" drill bit
- Tape measure
- Masking tape (2" wide works best)
- Level
- Caulking gun
- Clean paper towels or shop towels
- 2 x 4 lumber, as required for bracing (see Bracing Instructions)
- Denatured alcohol

Kit Contents

Confirm that all parts of this kit has been included before beginning installation.

STH Horizontal Storage Pod - pod only

STV Vertical Storage Pod - pod and tempered glass shelves.

STV3414 - 2 glass shelves

STV4614 - 2 glass shelves

STV5714 - 3 glass shelves

STHL Lighted Horizontal Storage Pod - pod with installed light strip, transformer and driver with 8 ft. cord.

STVL Lighted Vertical Pod - pod with installed light strip, tempered glass shelves, transformer and driver with 8 ft. cord. Refer to STV for number of shelves included.

For best results, use 100% clear silicone sealant for bonding this product to a wall. You will need one tube of 100% clear silicone sealant (tube sized to fit a standard caulking gun). Follow the application recommendation located in the Pod Installation of this manual.

Unpackaging

• Use care when opening the box so that you do not damage the pods.

• This product is shipped to you or your retail center after careful inspection. After purchasing the kit, carefully unbox and inspect the product for any shipping damage that may have occurred. If damage is found, report it immediately to the store of purchase. After inspection and during installation, protect the products from construction damage by moving them to another room or area until ready to install.

• Please use the model number located on the side of the box or the front of this manual when contacting us with questions concerning the installation of this unit.

• Installation of damaged product will void the warranty.

Preparation Tips

- Read these instructions carefully and familiarize yourself with the various parts of the kit.
- The mounting surface must be free of dirt, film, waxes, or any other residues.
- When you are installing a recessed accessory such as a storage pod, cut the hole after the panel is installed and fully supported by the wall. Remember to position the storage pod between the wall studs.

Installation Procedure - STH and STV

- Wall panels and sub wall (cement board) must be cut to install storage pods.
- Determine the placement location of the storage pod and mark the cut-out dimensions on the wall. Consult the cut-out dimensions below for your storage pod.

Horizontal Storage Pods


Model No	Cut-Out Dimensions	
	Width	Height
STH5714	56-1/8"	13-1/8"
STH4614	45-5/8"	13-1/8"
STH3414	33-5/8"	13-1/8"
STH1414	13-1/8"	13-1/8"

Vertical Storage Pods


Model No	Cut-Out Dimensions	
	Width	Height
STV5714	13-1/8"	56-1/8"
STV4614	13-1/8"	45-5/8"
STV3414	13-1/8"	33-5/8"

- Place pieces of masking tape over the area where the saw contacts the finished surface of the wall panel. Cut the panel and sub wall using a circular saw with a 60-80 tooth carbide blade or a saber saw with bi-metal blade (14 teeth per inch). Install a header top and bottom.


Horizontal Storage Box
Install a header top and bottom

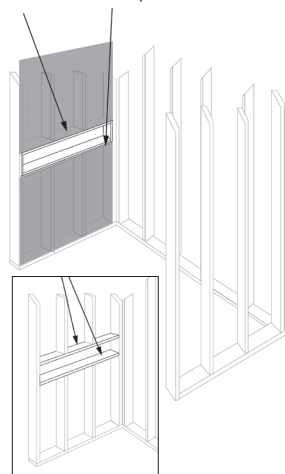

Vertical Storage Box
Install a header top and bottom

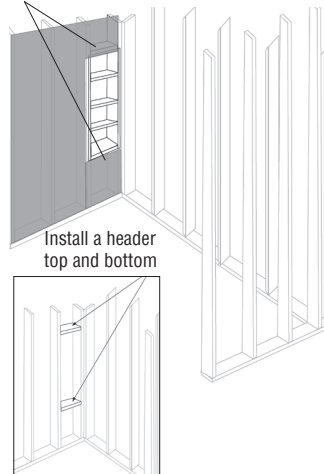

Storage Pod Detail

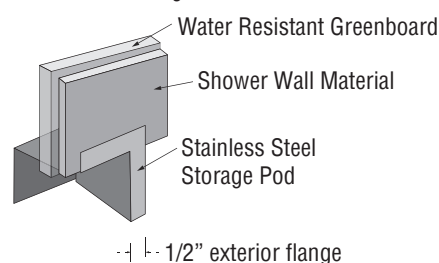

Installation Procedure

Storage Pod Installation continued

- Dry fit the storage pod into the cut out area. Before starting final installation, make sure the wall surface is clean and dry.
- Apply 100% silicone to the back side of the 1/2" frame surrounding the pod. Insert the storage pod into cut out area. Make sure the storage pod is straight and level.
- Apply masking tape to secure the storage pod to wall until the silicone caulk is dry. Drying time should be noted on silicone caulk tube.

Caulking Tips

- Follow the instructions on the silicone caulk tube.
- When job is complete, inspect all caulked areas for gaps and fill as needed.
- Clean up any excess silicone that was missed using denatured alcohol and a clean cloth.

Installation of Lighted Storage Pods

- Lighted Storage Pods have a light strip at the top of the pod. Illumination of lights is triggered from a motion sensor built into the storage pod. Power is Direct Current (DC) which includes transformer and driver with an 8 ft. cord.
- Glass shelves with locking shelf clips are included with the vertical pods.
- Follow Installation Procedure on previous page for STV storage pod. After Pod is installed in wall, remove the cover to the Battery Storage Compartment. Disconnect and remove battery from compartment. Charge battery with supplied micro USB. After battery is fully charged, reconnect to magnetic plate which is attached to storage pod. Replace cover.

Cleaning Tips

- Wipe down after each use with a soft microfiber or cotton cloth.
- Clean using a mild liquid soap and soft cloth or non-abrasive sponge. Rinse clean with water.
- Avoid using abrasive or caustic cleaners, bleach, chemicals, scrubbing brushes or scourers.