

Features

- Base designed to replace bathtub. Drain positioned 8-1/2" from wall to align with existing bathtub drain.
- Heavy Duty SMC Sheet Molding Compound Material
- Lightweight. Natural stone effect.
- 63" length bases meet ADA requirements
- SMC color-matched drain cover conceals a conventional 2" shower drain (not supplied)
- Stock bases can be used as a Single, Double or Triple Threshold
- Ultra low threshold front curb for easy access. After underlayment and finished floor are installed, there is a virtually flush entrance to the shower.
- Slip-resistant lightly textured slate floor maintains an easy to clean surface
- 1" high aluminum tiling flange included
- Weight capacity of 2204.6 pounds (1000 kg).
- 10 Year Limited Residential / 3 Year Commercial Warranty




Stock Sized Specified Models

	Model No.	Length A	Width B	Height	Ship Wt (lbs)
☐	FZSR6032R/L	59.1"	31.5"	1.0"	44.09
☐	FZSR6036R/L	59.1"	35.5"	1.0"	47.40
☐	FZSR6332R/L*	63"	31.5"	1.0"	46.30
☐	FZSR6336R/L*	63"	35.5"	1.0"	48.06

* Meets ADA requirements





Modern Slip Resistance with a stone-look texture. Slip resistant and easy to clean as well as.



CUSTOMIZABLE BASE

Note: Bases can be built to accommodate unique sizes. Notches can also be cut from the bases to allow for columns in a corner.



Base can be built to custom sizes within certain limitations. Can be trimmed up to 4" in width from side opposite drain or up to 2" from depth. Base is designed to be used as a single, double or triple threshold in stock sizes and single threshold models in custom sizes

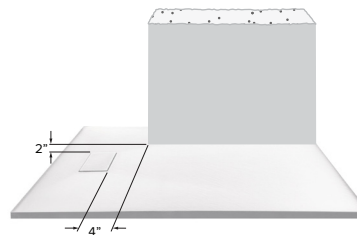

Tiling flange

To Be Specified: Color

☐	31 White
☐	32 Cameo
☐	40 Grey
☐	09 Black

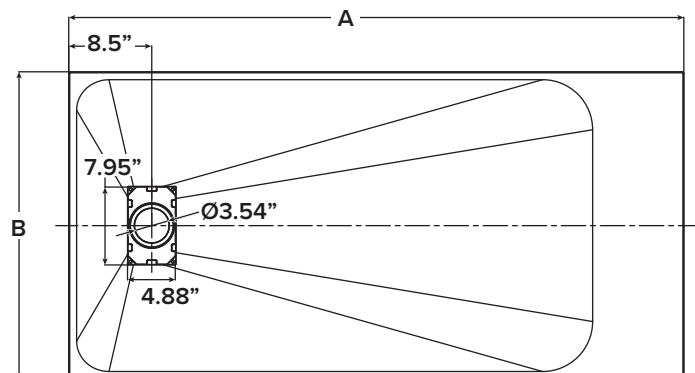

Compliance Certifications

Meets or Exceeds the Following Specification

- ASME A112.18.1 / CSA B125.125.1-11
- IAPMO 
- cUPC®

