

Features

- Single threshold for alcove installation.
- SMC sheet molding compound is made from a composite material composed of resin, fiberglass, and stone filler. Compression molded for precision radius and angles. strong, lightweight, slip resistant and scratch resistant.
- Beautiful, easy to clean and ultra-safe stone-look slip resistant texture provides comfortable, safe footing.
- Ultra low 2.6" threshold front curb for easy access as well as ultra wide
- 3.5" threshold width to hold modern barn door shower doors.
- Heavy duty 1" high integral tiling flange.
- Super strong base with ribbed construction. Up to 21% heavier than competitive bases.
- Color matched lift-off drain cover allows for easy cleaning and conceals a conventional shower drain. Eliminates the need for decorative drain covers to match faucetry. Drain not included.
- Weight capacity of 440.9 lbs (200 kg).
- 10 Year Limited Residential Warranty / 3 Year Commercial Warranty

Specified Models






FLU Ultra Low Shower Base							
	Model No.	A	B	C	D	E	Ship Wt. (lbs)
☐	FLU3636C	36"	36"	17.07"	2.6"	3.5"	36.05
☐	FLU4836C	48"	34"	16.07"	2.6"	3.5"	44.64

To Be Specified: Color

☐	31 White			
☐	32 Cameo			
☐	39 Grey			

White 31 Cameo 32 Grey 39

Drain Cover Detail

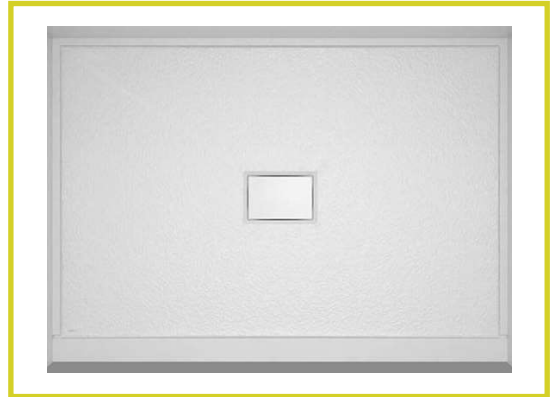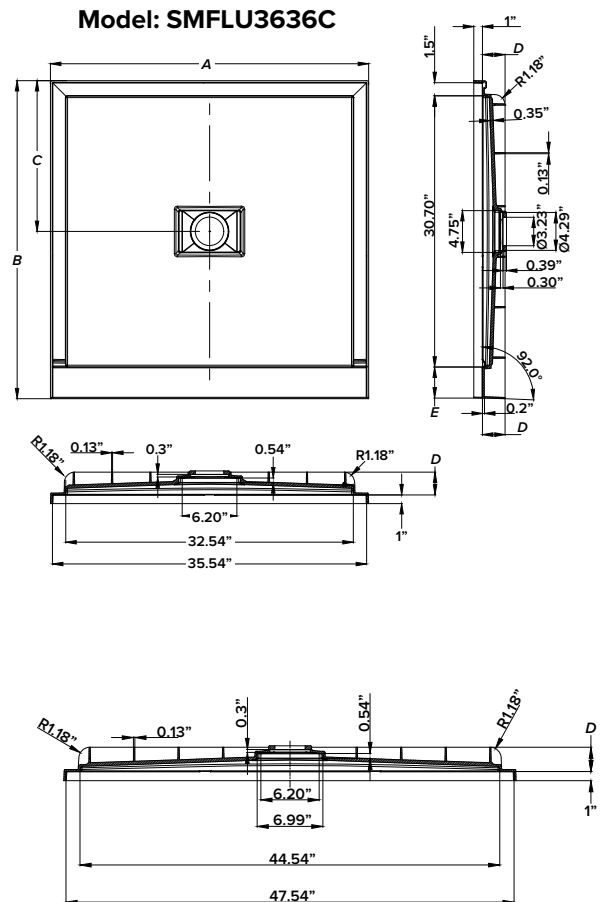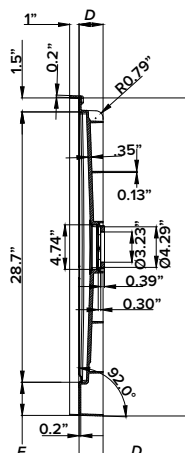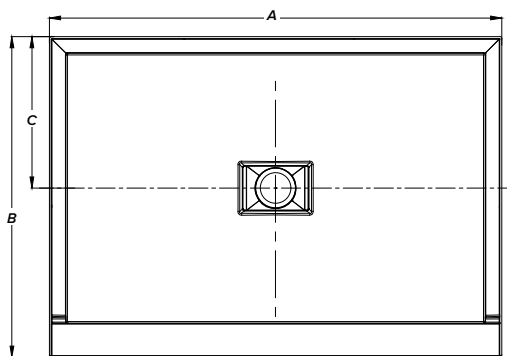

Ribbed Struture for superior strength. Up to 21% heavier than competitive bases.



Modern Slip Resistance with a stone look texture. Easy to clean as well as slip resistant.

Compliance Cetifications Meet or Exceeds the Following Specification

- ASME A112.18.1 / CSA B125.125.1-11
- IAPMO 
- cUPC®