

Features

- Heavy Duty SMC Sheet Molding Compound Material
- Trimslate shower bases with our unique adjustable depth threshold.
- Maximum depth can be adjusted by up to 2-1/2" without any trimming of the base.
- Trimslate bases can also be customized in the field to fit your space. Trim up to 4" in width from side opposite drain or up to 2" in depth away from drain.
- For bases 60" in length or less, a 60" add on trimmable threshold is included.
- For longer bases, an 80" long add on trimmable threshold is supplied.
- The threshold has a 4" wide flat surface to accommodate shower doors.
- SMC color-matched drain cover conceals a conventional 2" shower drain (not supplied).
- The slate floor has a lightly textured and slip-resistant surface that makes it safe, yet remains easy to clean.
- 13-3/4" center drain location for SMFZST models.
- 8-1/2" center drain location for SMFZSTR models. Bases are designed to replace bathtub as drain position will align with existing bathtub drain.
- 1" high aluminum tiling flange included
- Weight capacity of 2204.6 pounds (1000 kg).
- 10 Year Limited Residential / 3 Year Commercial Warranty




Stock Sized Specified Models

	Model No.	Length A	Min Width B	Max Width B	Height	Ship Wt. (lbs)
☐	SMFZST6736	67"	36.5"	39"	2.75"	76.06
☐	SMFZST7236	70.9"	36.5"	39"	2.75"	83.11
☐	SMFZSTR6032	59.1"	32.5"	35"	2.75"	61.73
☐	SMFZSTR6036	59.1"	36.5"	39"	2.75"	65.04
☐	SMFZSTR6332	63"	32.5"	35"	2.75"	72.75
☐	SMFZSTR6336	63"	36.5"	39"	2.75"	74.52

To Be Specified: Color

☐	31 White		
☐	32 Cameo	White 31	Dk Grey 40
☐	40 Dark Grey		
☐	09 Black	Cameo 32	Black 09

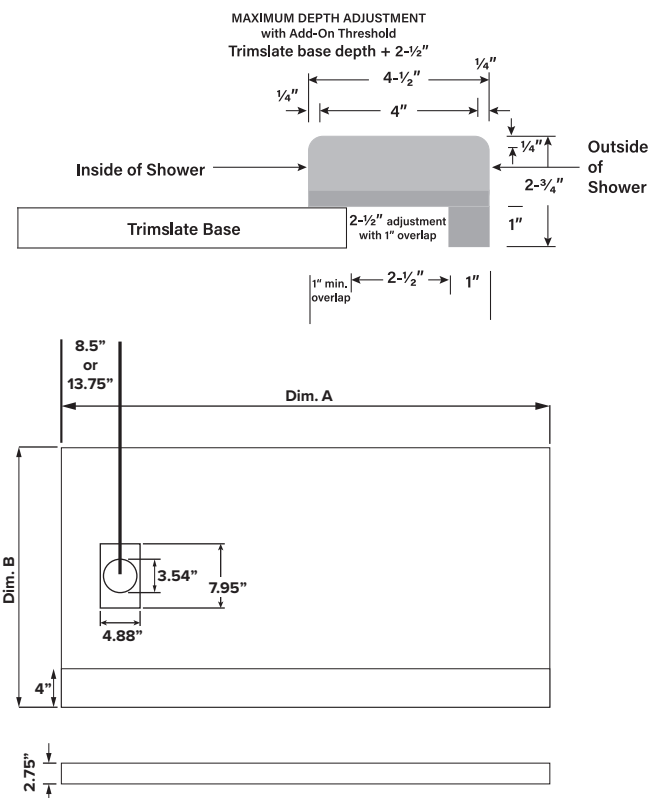

Meets or Exceeds the Following Specification

• ASME A112.18.1 / CSA B125.125.1-11

• cUPC® • IAPMO 