

Features


- Single threshold for alcove installation.
- SMC sheet molding compound material is made from a composite material composed of resin, fiberglass and stone. Compression molded solid surface for a precise radius and angles. It is strong, lightweight, slip resistant and scratch resistant.
- Heavy duty integral 1" high tiling flange for a waterproof installation.
- 3" wide threshold as well as a 3" threshold height for a modern design.
- Designed for installation for new or existing construction.
- Features a color matched concealed drain with removable cover that brings both a design element and comfort to your shower experience. Lift-off cover allows for easy cleaning. ABS drain is included.
- Weight capacity of 2204.6 pounds (1000kg)
- 10 Year Limited Residential Warranty / 3 Year Commercial Warranty.



Specified Model

	Model	A	B	C	D	E	F	G	H	Ship Wt. (lbs)
☐	SMFL4832C-	32"	16-15/16"	15-1/16"	24"	48"	47-13/16"	45-7/16"	27-5/8"	48.50
☐	SMFL4836C-	36"	18-15/16"	17-1/16"	24"	48"	47-13/16"	45-7/16"	31-5/8"	50.71
☐	SMFL6032C-	32"	16-15/16"	15-1/16"	30"	60"	59-13/16"	57-7/16"	27-5/8"	62.83
☐	SMFL6034C-	34"	19"	15"	30"	60"	59-13/16"	57-7/16"	29-3/4"	68.34
☐	SMFL6036C-	36"	18-15/16"	17-1/16"	30"	60"	59-13/16"	57-7/16"	31-5/8"	73.85

Modern Slip Resistance with a light rectangular comfortable texture. Easy to clean as well as slip resistant.




To Be Specified: Color

☐	01 White			
☐	02 Cameo			
☐	39 Grey			

White 01 Cameo 02 Grey 39

SMFL Classic Linear Base

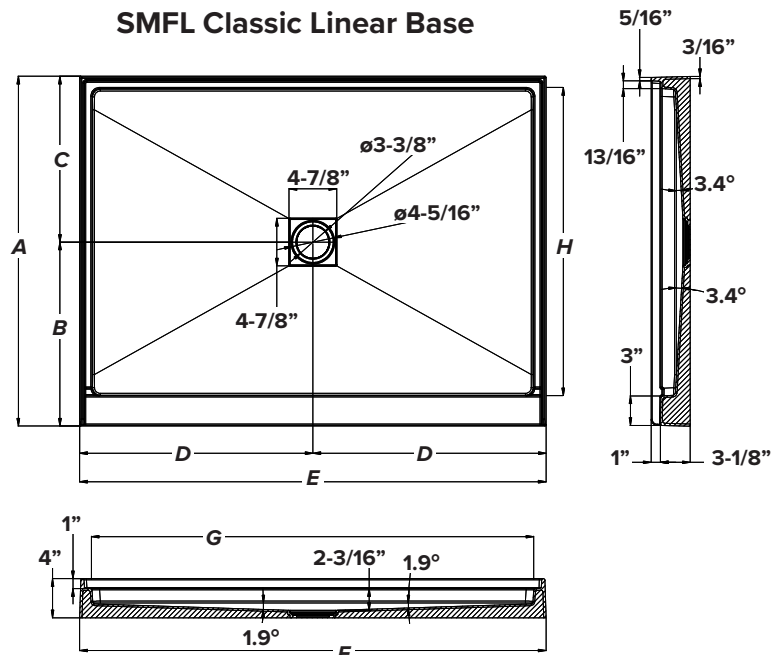

Compliance Certifications- Meets or Exceeds the Following Specifications

- ASME A112.18.1 / CSA B125.125.1-11
- ASTM 1028-96 coefficient of friction test (minimum rating of 0.67)
- IAPMO (IAPMO logo)
- cUPC®