


Features

- Solid material all the way through which is cast as a single piece.
- Aluminum Hydroxide (Bauxite) combined with pure acrylic polyester resin creates a homogenous material that is super dense and consistent throughout the base. This results in a product that is easy to repair, soft to the touch, and features gentle matte surfaces that will not support bacteria growth.
- Extremely low 2" threshold height for a sleek, modern look. Once the underlayment and tile are installed, there is about a 1" effective curb height for easy entry and exits.
- A wide 3-1/2" threshold depth to hold the modern barn door style shower doors. Also includes an integral 1" high tiling flange for a waterproof installation.
- Unique curving drain cover on end drain models and a round drain cover on the center drain model, in same color as base, conceal a shower drain. They also eliminate the need for decorative drain covers to match faucetry. Drain not included.
- Weight capacity of 250 lbs to 300 lbs.
- 10 Year Limited Residential Warranty / 3 Year Commercial Warranty

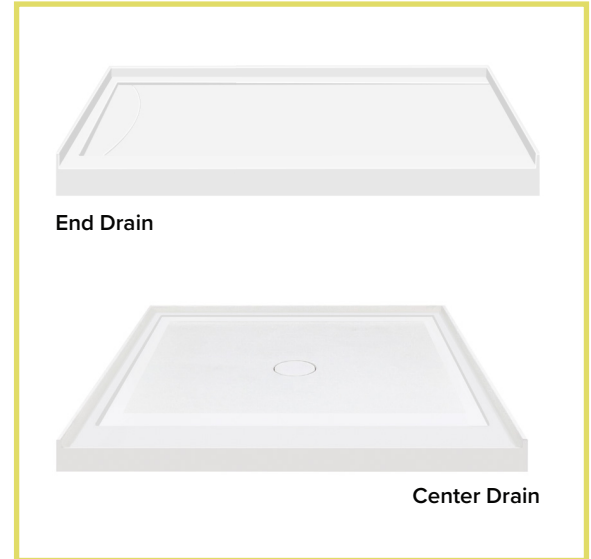

Specified Models


	Size	Model No.	Length	Width	Height	Total Height	Ship Wt. (lbs)
☐	36" x 36" x 2"	SMFSL3636C	36"	36"	2"	3"	69.45
☐	48" x 34" x 2"	SMFSL4834L/R	48"	34"	2"	3-3/4"	110.23
☐	60" x 32" x 2"	SMFSL6032L/R	60"	32"	2"	3-3/4"	112.44
☐	60" x 36" x 2"	SMFSL6036L/R	60-5/16"	36-3/16"	2"	3-3/4"	141.10

SMFSL3636C only available with Center Drain.


Subsequent sizes are available in a LEFT End Drain or RIGHT End Drain option.

To Be Specified: Color

☐	31 White		White 31		Cameo 32		Concrete 87
☐	32 Cameo						
☐	87 Concrete						

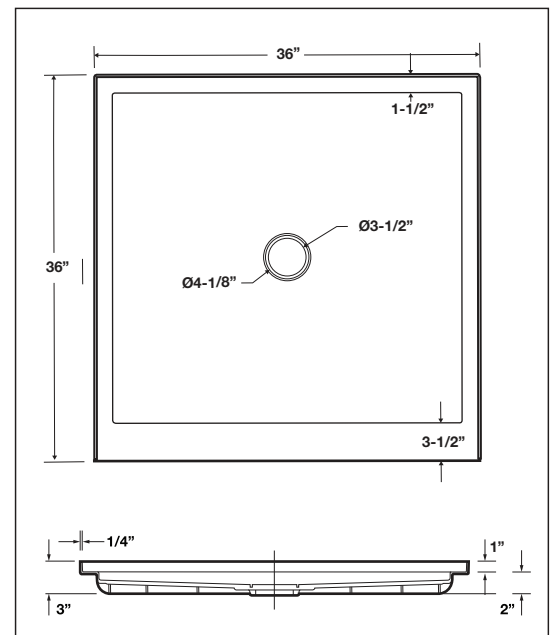

A	B	C
48"	43-7/16"	32"
60"	55-7/16"	34"
60-5/16"	55-3/4"	36-3/16"

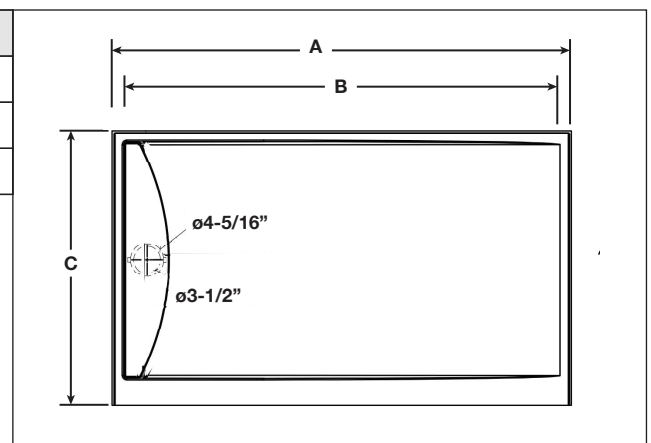

Compliance Certifications -

Meets or Exceeds the Following Specifications

- ASME A112.18.1 / CSA B125.125.1-11
- ASTM 1028-96 coefficient of friction test (minimum rating of 0.67)
- IAPMO 
- cUPC®