


Features

- SMC sheet molding compound material is made from a composite material composed of resin, fiberglass, and stone filler. Compression molded solid surface for a precise radius and angles. It is strong, lightweight, slip resistant and scratch resistant.
- Single threshold for alcove installation.
- Integral 1" high tiling flange for a waterproof installation and a 3" wide threshold as well as a 1.1" threshold height.
- Meets ADA guidelines when installed according to instructions.
- Installation for new and existing construction.
- Weight capacity of 2204.6 pounds (1000 kg).
- 10 Year Limited Residential Warranty / 3 Year Commercial Warranty



Features a 304 stainless steel concealed drain removable cover that brings both a design element and comfort to your shower experience. Lift-off cover allows for easy cleaning. ABS drain is included.

FTD Trench Drain Base

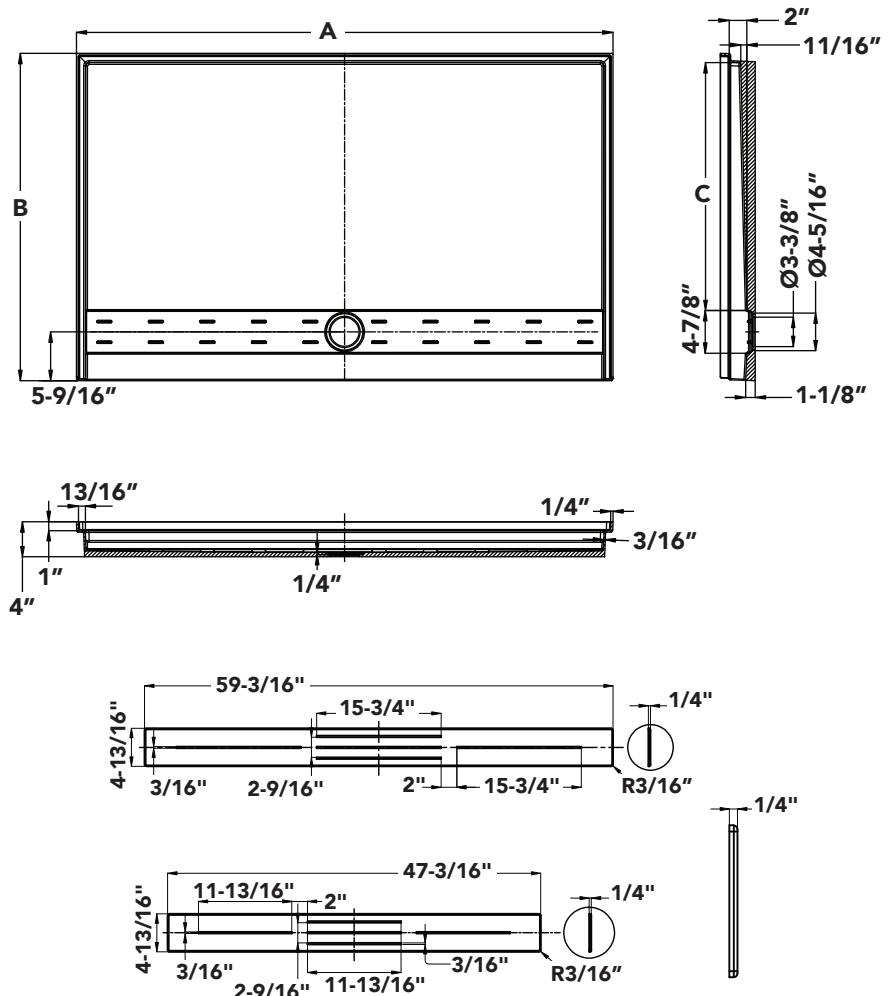

SHOWER BASES

Specified Model

SMFTD Center Drain Shower Bases					
	Model	A	B	C	Ship Wt. (lbs)
☐	FTD4836-	49-1/2"	37-1/2"	28-7/16"	49.60
☐	FTD6030-	61-1/2"	31-1/2"	22-7/16"	56.22
☐	FTD6032-	61-1/2"	33-1/2"	24-7/16"	59.08
☐	FTD6034-	61-1/2"	35-1/2"	26-7/16"	61.73
☐	FTD6036-	61-1/2"	37-1/2"	28-7/16"	63.93

Available in White

☐ White 31

Compliance Certifications-

Meets or Exceeds the Following Specifications

- ASME A112.18.1 / CSA B125.125.1-11
- IAPMO 
- cUPC®



Meets the Americans with Disabilities Act guidelines and ANSI A117.1 requirements for accessible and usable building facilities-check local codes when installed per accessibility guidelines of the act