



FEATURES

- Single threshold for alcove installation.
- SMC Sheet Molding Compound is made from a composite material composed of resin, fiberglass, and stone filler. Compression molded for precision radius and angles. Strong, lightweight, slip resistant and scratch resistant.
- Designed to replace existing bathtub drain locations. Base uses same footprint and drain location. Beautiful, easy to clean and ultra-safe stone-look slip resistant texture provides comfortable, safe footing.
- Ultra low 2.6" threshold front curb for easy access as well as ultra wide 3.5" threshold width to hold modern barn door shower doors.
- Heavy duty 1" high integral tiling flange will not crack on the way to the jobsite.
- Super strong base with ribbed construction. Up to 21% heavier than competitive bases.
- Color matched lift-off drain cover allows for easy cleaning and conceals a conventional shower drain. Eliminates the need for decorative drain covers to match faucetry. Drain not incl
- Weight capacity of 440.9 lbs (200 kg).
- 10 Year Limited Residential Warranty / 3 Year Commercial Warranty



Ribbed Structure for superior strength. Up to 21% heavier than competitive bases.



Modern Slip Resistance
with a stone look texture.
Easy to clean as well as
slip resistant.


Specified Models

Specified Models		Drain Location		Length	Width	HT.	Ship Wt. (lbs)
	Size	Left	Right				
	60" x 30" x 2.6"	SMFLU6030L	SMFLU6030R	60"	30"	2.6"	51.26
	60" x 32" x 2.6"	SMFLU6032L	SMFLU6032R	60"	32"	2.6"	52.91

To Be Specified: Color

☐	31 White			
☐	32 Cameo	White 31	Cameo 32	Grey 39
☐	39 Grey			

	Model	Size	Corresponding SMFL Base
	SMFLUCVR30-SS	24.5" x 5"	SMFLU6030L/R
	SMFLUCVR32-SS	26.5" x 5"	SMFLU6032L/R

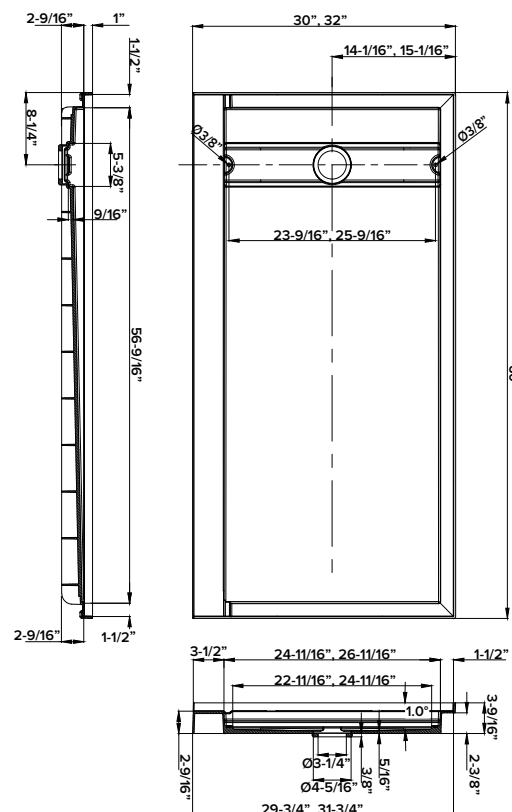

Compliance Cetifications-

Meet or Exceeds the Following Specification

- ASME A112.18.1 / CSA B125.125.1-11
(minimum rating of 0.67)
- IAPMO 
- cUPC®