




## FEATURES

- Single threshold for alcove installation.
- SMC Sheet Molding Compound is made from a composite material composed of resin, fiberglass, and stone filler. Compression molded for precision radius and angles. Strong, lightweight, slip resistant and scratch resistant.
- Designed to replace existing bathtub drain locations. Base uses same footprint and drain location. Beautiful, easy to clean and ultra-safe stone-look slip resistant texture provides comfortable, safe footing.
- Ultra low 2.6" threshold front curb for easy access as well as ultra wide 3.5" threshold width to hold modern barn door shower doors.
- Heavy duty 1" high integral tiling flange will not crack on the way to the jobsite.
- Super strong base with ribbed construction. Up to 21% heavier than competitive bases.
- Color matched lift-off drain cover allows for easy cleaning and conceals a conventional shower drain. Eliminates the need for decorative drain covers to match faucetry. Drain not incl
- Weight capacity of 440.9 lbs (200 kg).
- 10 Year Limited Residential Warranty / 3 Year Commercial Warranty

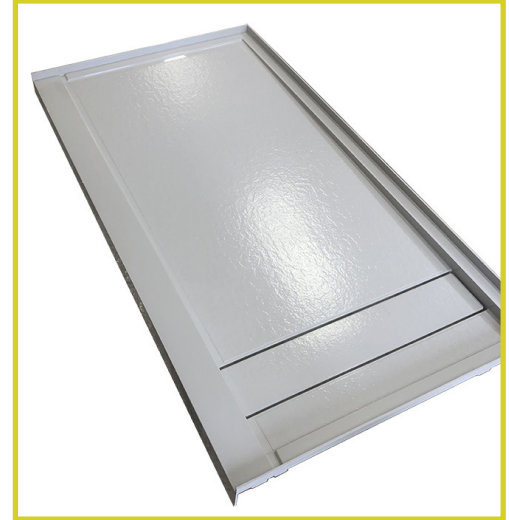

Ribbed Structure for superior strength. Up to 21% heavier than competitive bases.



Modern Slip Resistance with a stone look texture. Easy to clean as well as slip resistant.


| Specified Models         |                  | Drain Location |          | Length | Width | HT.  | Ship Wt. (lbs) |
|--------------------------|------------------|----------------|----------|--------|-------|------|----------------|
|                          | Size             | Left           | Right    |        |       |      |                |
| <input type="checkbox"/> | 60" x 30" x 2.6" | FLU6030L       | FLU6030R | 60"    | 30"   | 2.6" | 51.26          |
| <input type="checkbox"/> | 60" x 32" x 2.6" | FLU6032L       | FLU6032R | 60"    | 32"   | 2.6" | 52.91          |

## To Be Specified: Color

|                          |          |                                                                                     |                                                                                     |                                                                                     |
|--------------------------|----------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <input type="checkbox"/> | 31 White |  |  |  |
| <input type="checkbox"/> | 32 Cameo |                                                                                     |                                                                                     |                                                                                     |
| <input type="checkbox"/> | 39 Grey  |                                                                                     |                                                                                     |                                                                                     |

White 31 Cameo 32 Grey 39

|                          | Model       | Size       | Corresponding SMFL Base |
|--------------------------|-------------|------------|-------------------------|
| <input type="checkbox"/> | FLUCVR30-SS | 24.5" x 5" | FLU6030L/R              |
| <input type="checkbox"/> | FLUCVR32-SS | 26.5" x 5" | FLU6032L/R              |

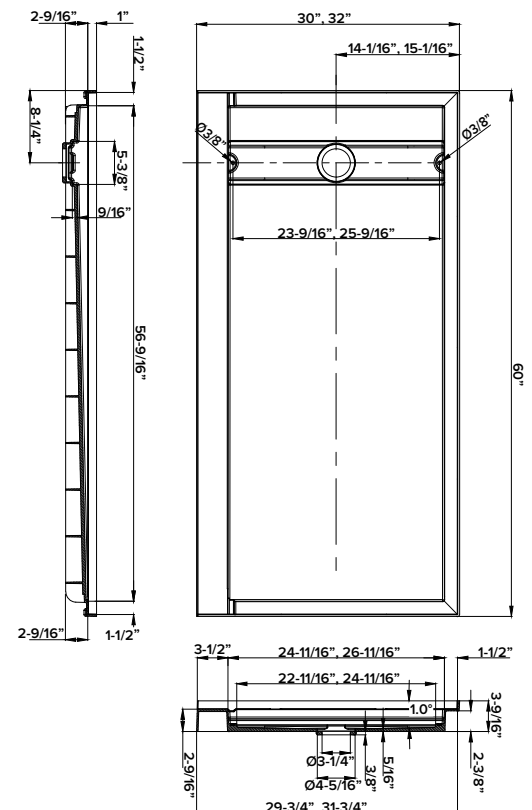

## Compliance Certifications-

### Meet or Exceeds the Following Specification

- ASME A112.18.1 / CSA B125.125.1-11 (minimum rating of 0.67)
- IAPMO 
- cUPC®