



FEATURES

- Single threshold for alcove installation.
- Low front threshold shower base for tile can be recessed into floor for an even lower threshold.
- Select from center drain or end drain location. For end drain location must order either LH or RH drain.
- Light weight SMC sheet molding compound material.
- Installation for new and existing construction.
- Integral tiling flange for a waterproof installation.
- Easy installation. Level with thinset mortar mix.
- Self supporting.
- Linear drains can be used in this base.
- Includes shower drain with polished stainless steel drain cover.
- 10 Year Limited Residential Warranty / 3 Year Commercial Warranty

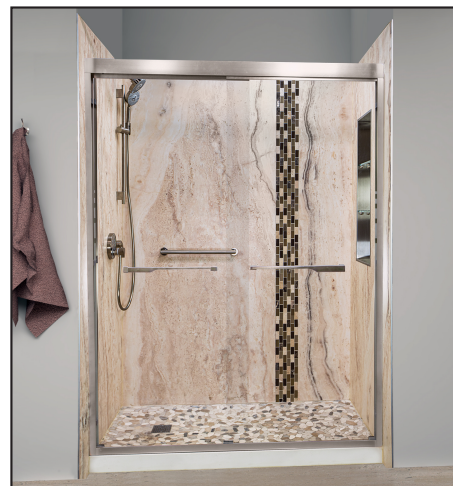

	Model	A	B	C	D	Wt.
☐	FTT4940C	49"	40.5"	19"	21"	61.6
☐	FTT6030C	60"	30"	14"	16"	57.2
☐	FTT6032C	60"	32"	15"	17"	61.6
☐	FTT6034C	60"	34"	16"	18"	66
☐	FTT6036C	60"	36"	17"	19"	70.4
☐	FTT6030R/L	60"	30"	14"	16"	57.2
☐	FTT6032R/L	60"	32"	15"	17"	61.6
☐	FTT6034R/L	60"	34"	16"	18"	66
☐	FTT6036R/L	60"	36"	17"	19"	70.4

FTT Center Drain Models




FTT End Drain Models




Compliance Certifications - Meets or Exceeds the Following Specifications

- IGC 154-2012
- ASME A112.18.1 / CSA B125.125.1-11
- IAPMO 
- cUPC®


Center Drain Models

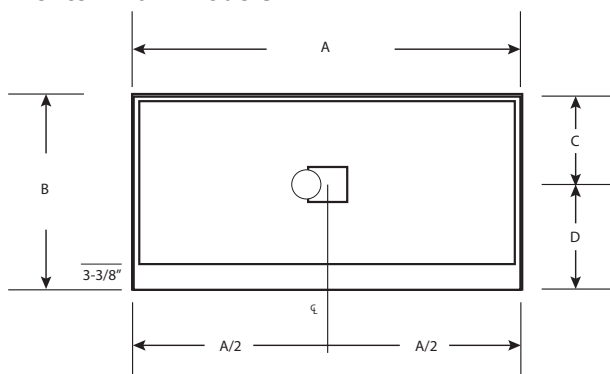

Left Drain Models

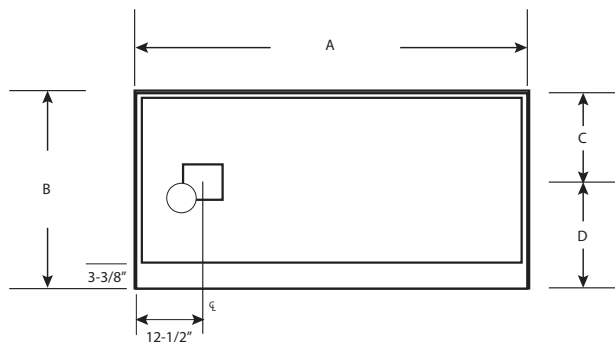

Right Drain Models

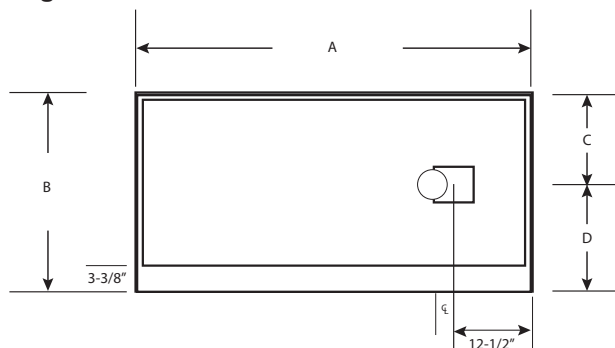

SHOWER BASES