

FEATURES

- Close coupled 1-pc. toilet with top-mount slow closing seat.
- 12" (305mm) rough-in.
- Vitreous china.
- 1.28 gpf (4.8Lpf) / 0.8 gpf (3 LPF)
- High efficiency, low consumption dual flush, utilizes 20% less water.
- Siphon action flush.
- 800 MaP rating.
- 16½" rim height for accessible application.
- Smooth-sided, concealed fully glazed trapway.
- Chrome dual-flush top button actuator.
- Color-matched side bolt covers.
- 5 Year Limited Residential Warranty
1 Year Commercial Warranty



COLOR

- White



Specified Model

MODEL NO.	DESCRIPTION	Length	Width	Height
SMBTS-2415	Elongated Dual Flush Toilet with slow-closing seat	20½"	15"	30½"

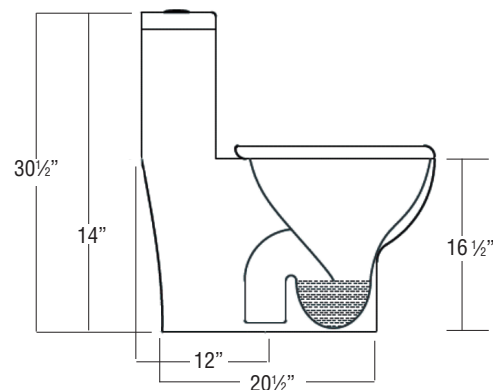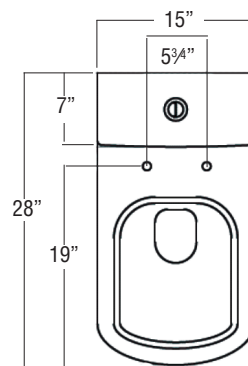

Compliance Certifications -

Meets or Exceeds the Following Specifications

- ASME A112.19 CSA
- UPC®



Meets the Americans with Disabilities Act guidelines and ANSI A117.1 requirements for accessible and usable building facilities-check local codes